

3157

Instruction


067R9603

067R9603

Thermostatic expansion valves, type TGE S, TGE M, TGE L

PB = 46 bar / MWP = 667 psig

P_{test} = 49.5 bar (720 psig)

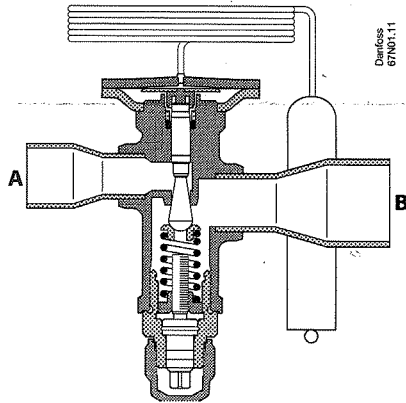

Balanced port design
Adjustable setting


Flow direction

Normal: A → B

Reverse: B → A

Q_{nom} A → B (kW) = 100%

Q_{nom} B → A (kW) = 85%

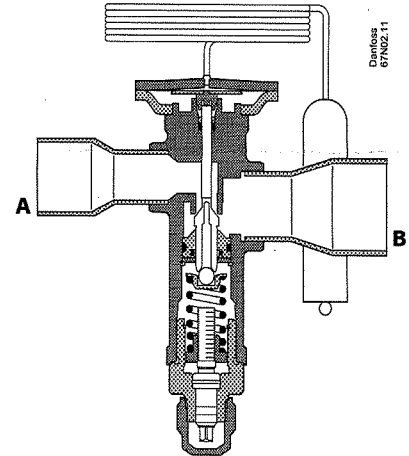

Balanced port design
(biflow & adjustable setting)

Refrigerant

R22, R407C, R404A/R507, R410A, R134a

Range { N max. 100°C (210°F)
K max. 150°C (300°F)

